



# LOTUS C16

(LOTUS H47 PB22 BI +A)

## VERSIONS

LOTUS C16 (fixed)

## DISTRIBUTION

Retail/Contract Collection

## DESIGN

Jana Sarlette

## LABEL

Mobitec Label

## STRUCTURE

Under press formed 10mm plywood shell

## PADDING

Seat: Padded with 4 successive layers: 20mm layer Super E foam, 20mm layer of 43kg/m<sup>3</sup> HR foam, 20mm layer of 45kg/m<sup>3</sup> HT foam, 5mm T25 foam.

Backrest: Upholstered with 2 successive layers: 20mm layer of 43kg/m<sup>3</sup> HR foam, 10mm layer of 35kg/m<sup>3</sup> HR foam.

## FEET

Solid wooden feet in beech, oak or walnut

## GLIDERS

Solid wooden feet in beech, oak or walnut

## SPECIAL FEATURES

Please note that the base frame still needs to be fitted under the seat shell after delivery. This takes about 4 minutes per chair, even for those without prior experience.

## UPHOLSTERY

Cover	Fixed (cm)*	Loose fixed (cm)*	Loose cover (cm)*	Leather (m <sup>2</sup> )*
Uni	-	-	-	-
Bi**	(a) 90	(a) -	(a) -	(a) 1.3
	(b) 90	(b) -	(b) -	(b) 1.4

\* fabric or faux leather metres needs in cm on a roll width of 140cm, leather needs per m<sup>2</sup>.


Leather and faux-leather upholsteries (always fixed)

\*\* The first upholstery (a) is always used for the seat.

## SECURITY

This product does not require any specific safety warnings, as it is safe to use under normal conditions.

## DIMENSIONS (CM)

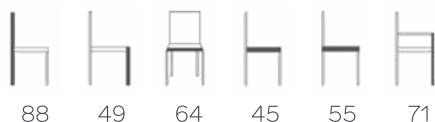

## WEIGHT & PACKAGING

Product net weight: 9.3 Kgs

Number of pieces per carton: 1 pc(s)

Carton gross weight: -

Carton dimensions: 68x60x50